



CAPE-0100NPT



PATENTS

United States	10,090,653 10,673,216 11,011,896
Australia	2,017,345,352
Canada	3,039,593
China	ZL201780063935.6
Japan	6929948

ADDITIONAL U.S. AND INTERNATIONAL PATENTS PENDING

Join the Industrial (Cable Gland) Revolution

An Extreme Idea Simplifies Complex Power, Communication, Control and Signal Connections

Lower your costs compared to traditional cable glands

Simplify design, procurement and installations

Lighten the load with high-performance engineering plastics and elastomeric materials



CapelIndustries.com
816.489.6471

Designed for Global Certification, Non-Metallic Cable Glands for the World's Toughest Environments

The Premium Performance of Stainless Steel, but Not the Premium Price

Higher performance with lower price increases confidence and flexibility for use across most applications

Simple specification for use in ordinary and hazardous locations

-60c to +80c (-76F to +176F)

Flexible Design Allows Widest Range of Cable Sizes

Reduce labor costs and time when cable sizes change in the field

Faster, more accurate installations improve project timelines

Superior cable retention eliminates risk of loosening compression

High-Tech Polymer and Elastomer Materials

Lower price, not performance with reduced material and manufacturing costs

Replace stainless steel and metal cable glands in corrosive and non-corrosive applications

One-and-done, halogen-free material simplifies specification, procurement, installation and maintenance saves time and money.

Technical Classifications*

IP66	NEMA 4X
Ex eb IIC T6 Gb	+176 °F
Ex ta IIIC & T100 Da	↑ -76 °F
	UL94 V-0 V-0/5VA

Certification Schemes*

IECEx	cLCUs
ATEX	cCSAus
UL	cETLus

Compliance Standards

EN 60079-0:2018
 EN IEC 60079-7:2015+A1:2018
 EN 60079-31:2014
 IEC 60079-0:2017
 IEC 60079-7:2015/AMD1:2017
 IEC 60079-31:2013
 CAN/CSA-C22.2 No. 60079-0:15
 CAN/CSA-C22.2 No. 60079-7:16
 CAN/CSA-C22.2 NO. 60079-31:15
 UL 60079-0 (Ed. 6)
 UL 60079-7 (Ed. 5)
 UL 60079-31 (Ed. 2)
 UL 5148 (Ed.6) / CSA-C22.2 No. 18.3-12 -
 C22.2 NO. 94.2-15

Markings*

Class I Zone 1,
 Class I Zone 2 and
 Class II Zone 20
 Class I, Div 2, Groups ABCD
 Class II, Div 1 Groups EFG
 Class III, Div 1

For Industries That Require A Better Connection

Data Centers & Telecom

Military

Chemical

Utilities

Water Treatment & Desalination

Solar

Shipbuilding

Pulp & Paper

Oil & Gas

Wind Power

Mining

OEMs


4 sizes cover cable range from 0.25" to 1.25"

Patented design with integrated, constant-force earthing spring provides grounding continuity of cable armor

Fewer parts for installation with integrated environmental seal

For armored and non-armored cable types

Pressure dome "click-lock" technology

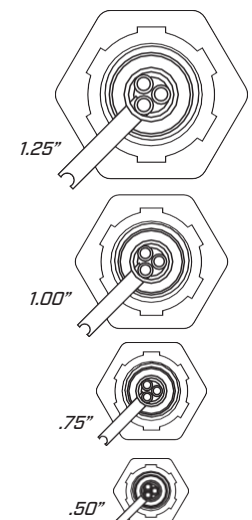

To Simplify Complex Connections

Control & Automation Panels

Lighting Control Panels

Electric Heat Trace Panels

Junction Boxes

Light Fixtures & Housings

Motor Connections

For Excellent Resistance Against

Chemicals

Hydrocarbons

UV

Impacts

Acids

Alkalis

Mildew

Bleaches

Aging

Sunlight

Abrasion

A One-and-Done Solution Eliminates Multiple SKUs, Simplifies Design and Specification, and Speeds Installation